

上海良信电器股份有限公司

Shanghai Liangxin Electrical Co., Ltd.

(NDG3V-250~800 隔离开关)

(NDG3V-250~800 Switch-disconnectors)

产品说明书

Product Manual

(IPD-ENG-DEV-T32 A0 2019-11-05)


编制	赵振兴	日期	2021-02-23
审核	杨子坤	日期	2021-02-23
会签	付传涛	日期	2021-02-23
批准	王继理	日期	2021-02-23

修订记录					
版本	修订原因/内容	实施日期	编制人	审核人	批准人
0	新增文件	20200401	郑 蕾	蒋兆勇	王继理
1	手柄柜门安装部分螺钉长度勘误	20200603	郑 蕾	蒋兆勇	王继理
2	新增 NDG3V-500~800 内容	20210223	赵振兴	杨子坤	王继理

目 录


1. 产品本体安装/ Installation of Switch-disconnectors.....	4
2. 相间隔板安装/ Mounting of interphase barrier.....	4
3. 辅助触头安装/ Mounting of auxiliary contact.....	5
4. 方轴安装/ Mounting of shaft.....	5
5. 手柄柜门安装/ Panel drilling for handle.....	6
6. 手柄挂锁安装/ Mounting of handle padlock.....	6
7. 外形安装尺寸/Outline and installation dimensions.....	7
8. 接线方式/ Circuit diagram.....	9

1. 产品本体安装/ Installation of Switch-disconnectors

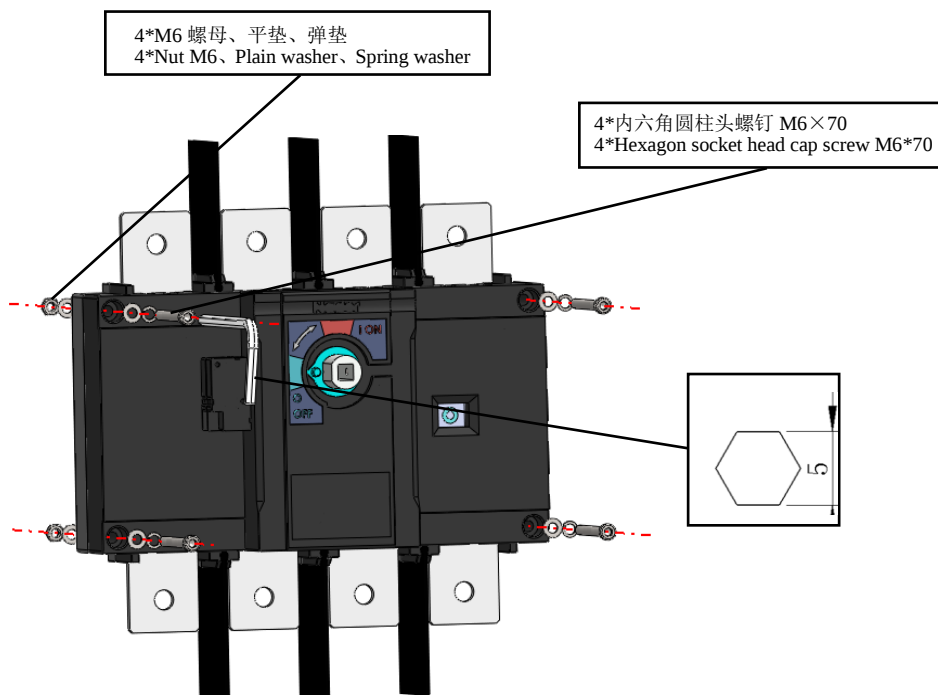


产品安装位置说明：产品可垂直安装及水平安装。当垂直安装时，触头位置视察窗不得朝上，如下图第 4 种方式。安装垂直面的倾斜度不大于 5° 。


Installation position: vertical installation or horizontal installation. AS the 4th follow diagram show, when vertical installation, inspection window of the contact should not be upward. The product should be mounted within 5° of the vertical mounting plane in case the characters of the product are affected.

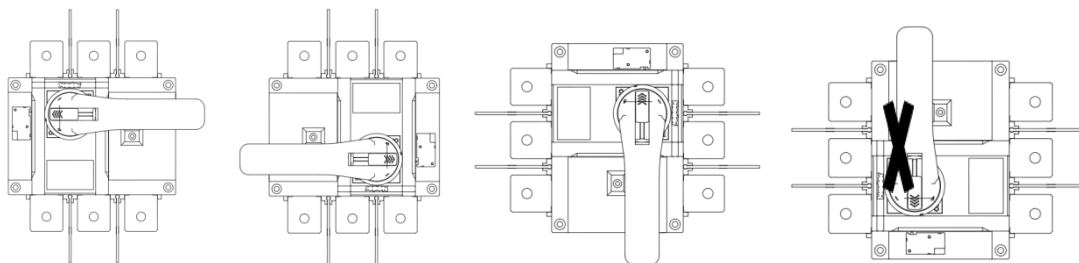


2. 相间隔板安装/ Mounting of interphase barrier

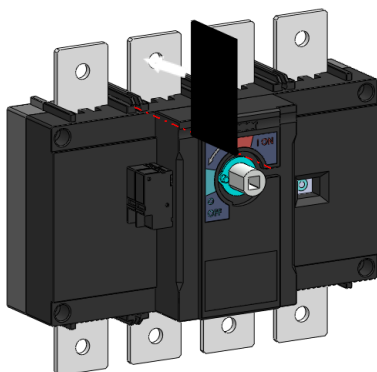


3. 辅助触头安装/ Mounting of auxiliary contact

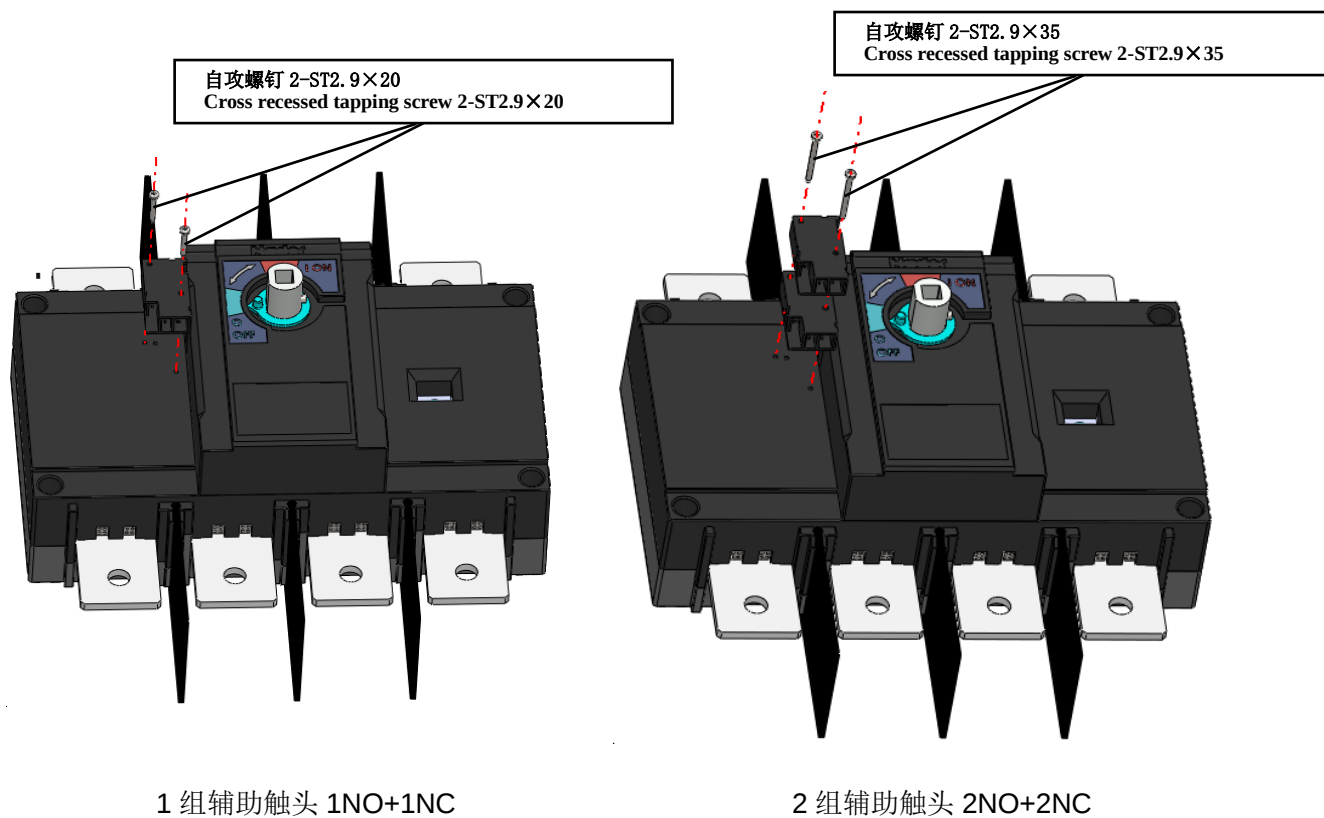

4. 方轴安装/ Mounting of shaft

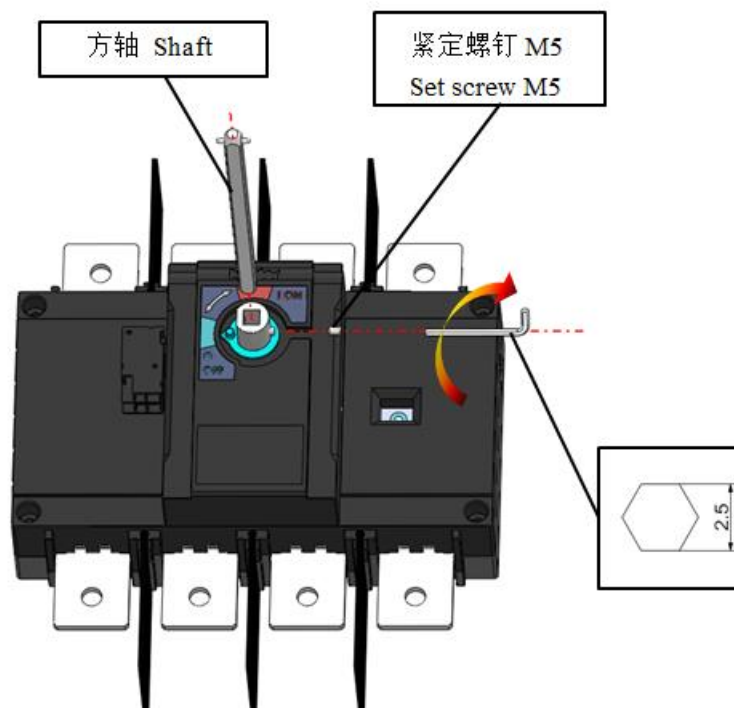


5. 手柄柜门安装/ Panel drilling for handle

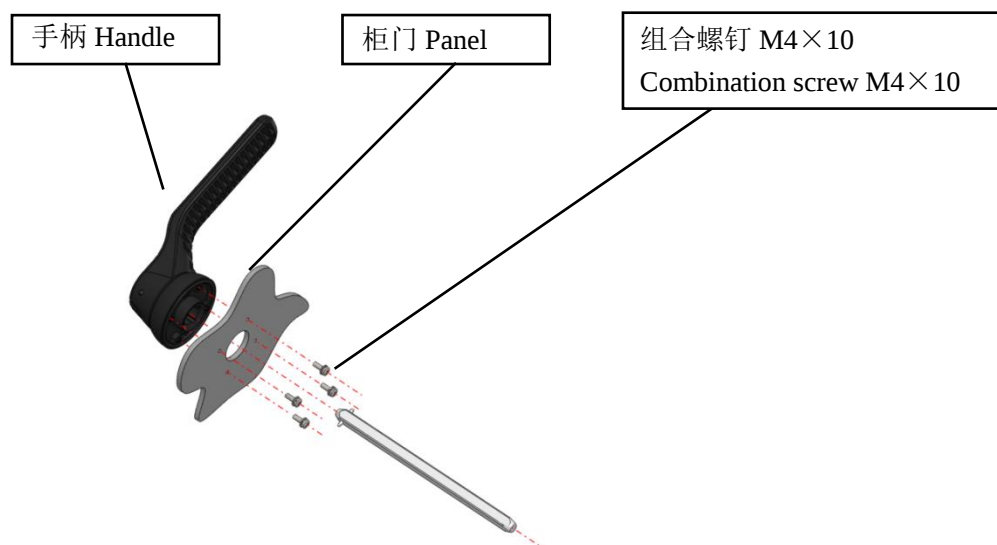


注：手柄 ON/OFF 位置和产品 ON/OFF 位置对应

Notice: "ON/OFF" position of the handle corresponds to "ON/OFF" status of switch

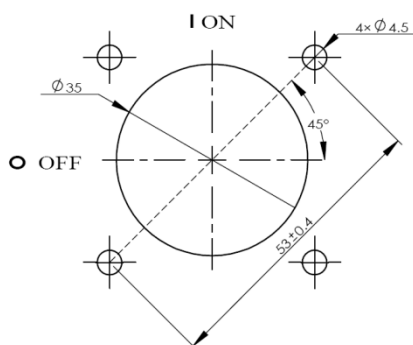


柜门安装孔尺寸 Panel drilling

6. 手柄挂锁安装/ Mounting of handle padlock

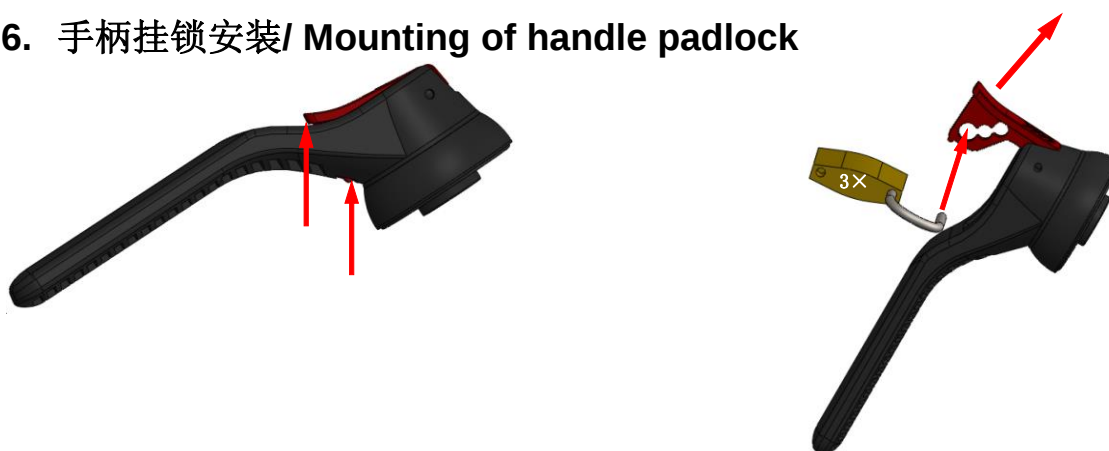


7. 外形安装尺寸/Outline and installation dimensions

7.1 三极产品外形和安装尺寸 Outline and installation dimension of three-pole product



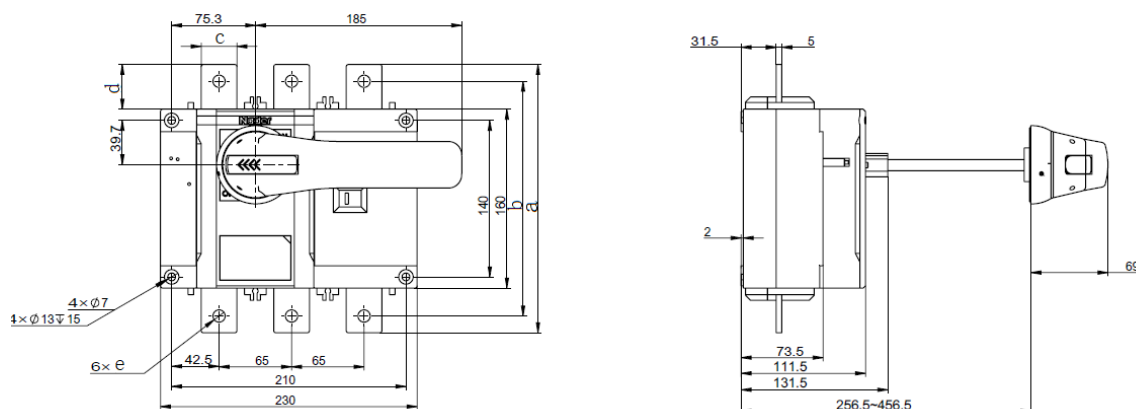


壳架	a	b	c	d	e
NDG3V-250~500	240	210	32	40	Φ11
NDG3V-630~800	260	220	45	50	Φ12.5

7.2 二极产品外形和安装尺寸 Outline and installation dimension of two-pole product

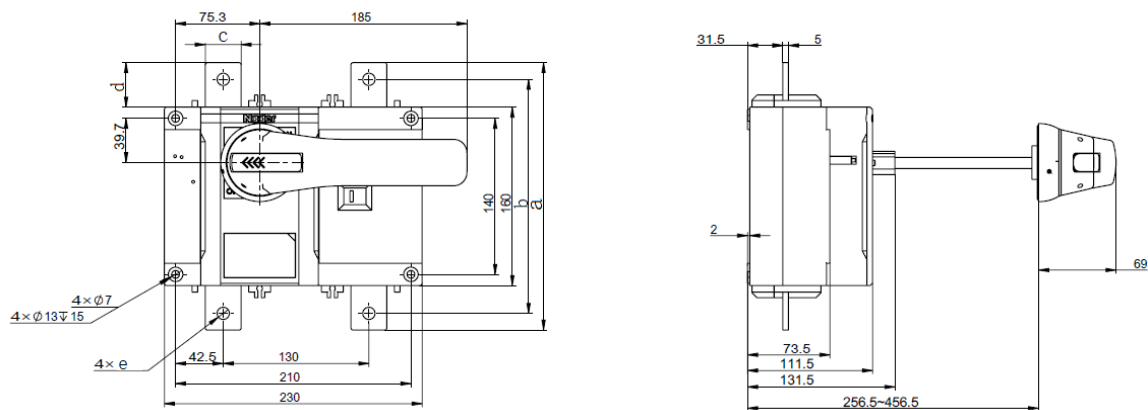

壳架	a	b	c	d	e
NDG3V-250~500	240	210	32	40	Φ11
NDG3V-630~800	260	220	45	50	Φ12.5

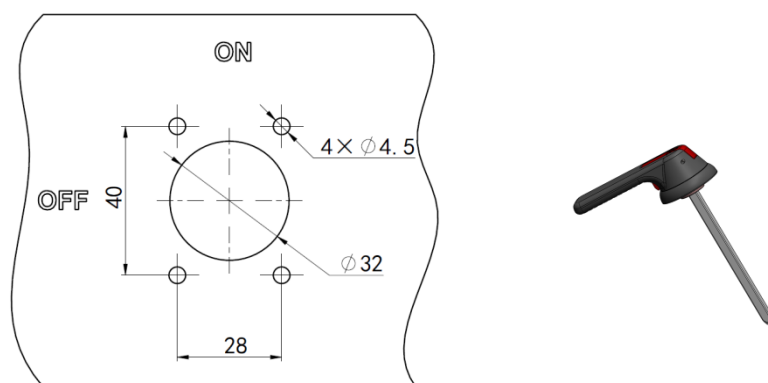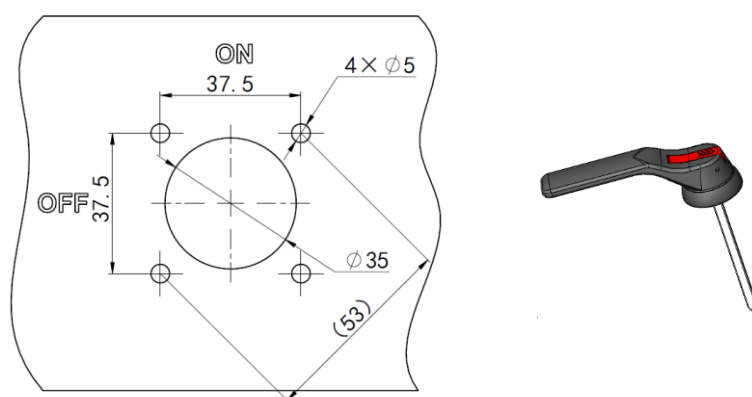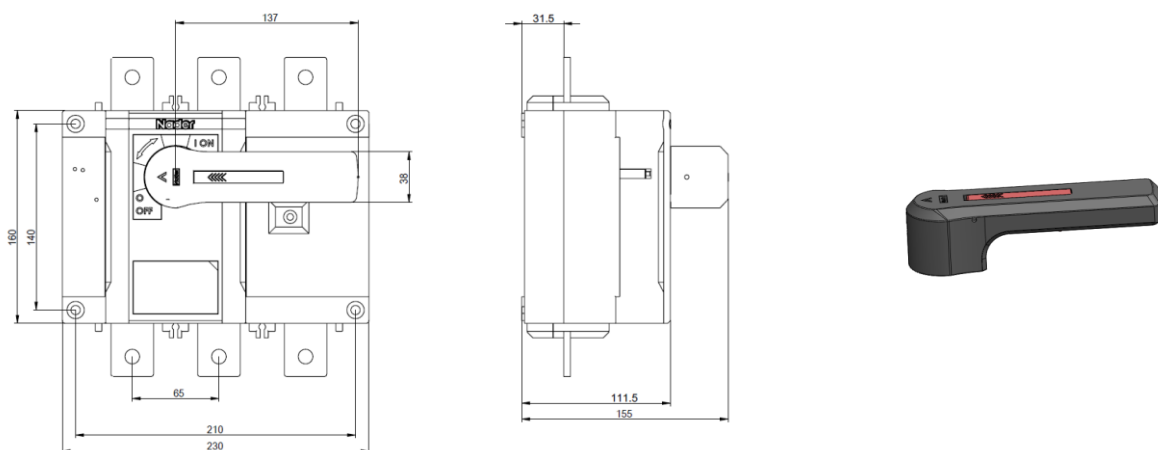

8. 接线方式/ Circuit diagram

