

上海良信电器股份有限公司

Shanghai Liangxin Electrical Co., Ltd.

(NDG3A-1000/1250 隔离开关)

(NDG3A-1000/1250 Switch-disconnectors)

产品说明书

Product Manual

(IPD-ENG-DEV-T32 A0 2019-11-05)

编制	郑蕾	日期	2020.06.03
审核	蒋兆勇	日期	2020.06.03
会签	付传涛	日期	2020.06.04
	柯柏林		2020.06.04
批准			
	王继理	日期	2020.06.04

2020.06.04
文件控制


[illegible]

目 录

1. 产品本体安装/ Installation of Switch-disconnectors	4
2. 相间隔板安装/ Mounting of interphase barrier	4
3. 辅助触头安装/ Mounting of auxiliary contact	5
4. 方轴安装/ Mounting of shaft	5
5. 手柄柜门安装/ Panel drilling for handle	6
6. 手柄挂锁安装/ Mounting of handle padlock	6
7. 外形安装尺寸/Outline and installation dimensions	7
8. 接线方式/ Circuit diagram	8




1. 产品本体安装/ Installation of Switch-disconnectors

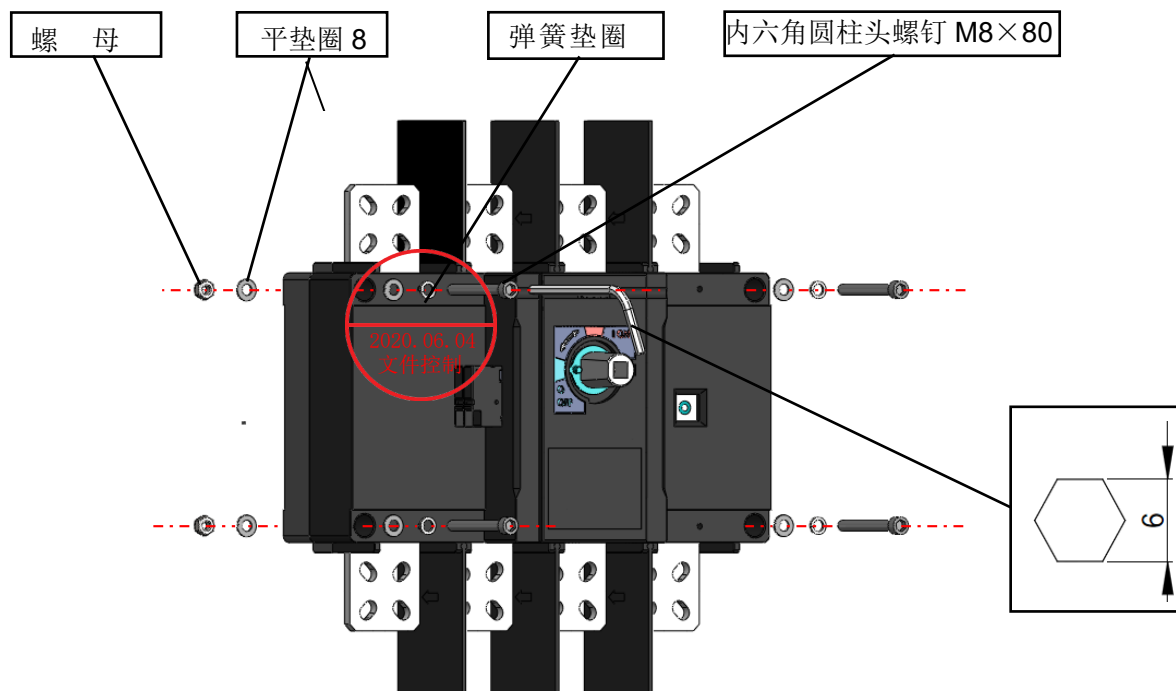


产品安装位置说明: 产品可垂直安装及水平安装。当垂直安装时, 触头位置视察窗不得朝上, 如下图所示第 4 种方式。安装垂直面的倾斜度不大于 5° 。


Installation position: vertical installation or horizontal installation. AS the 4th follow diagram show, when vertical installation, inspection window of the contact should not be upward. The product should be mounted within 5° of the vertical mounting plane in case the characters of the product are affected.

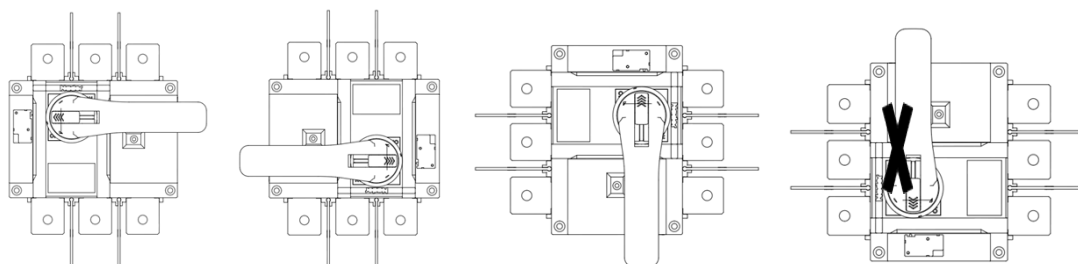


2. 相间隔板安装/ Mounting of interphase barrier

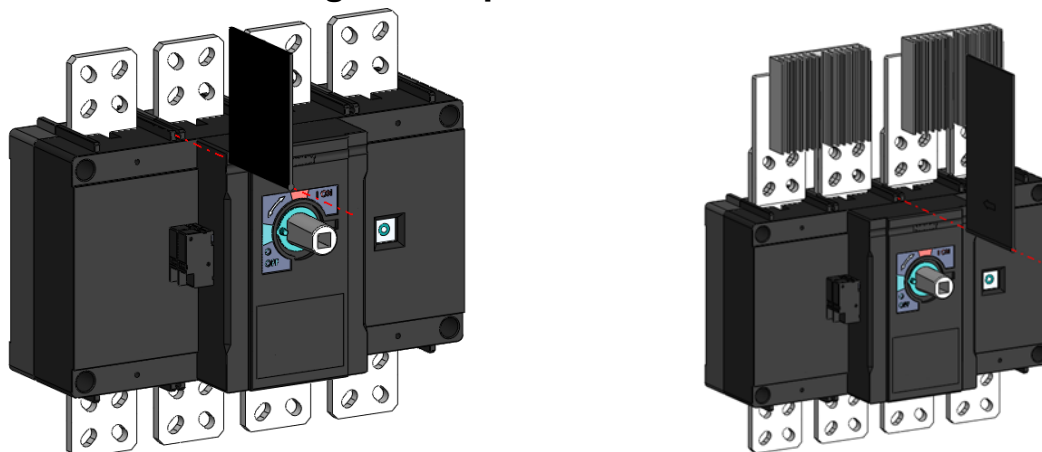


3. 辅助触头安装/ Mounting of auxiliary contact

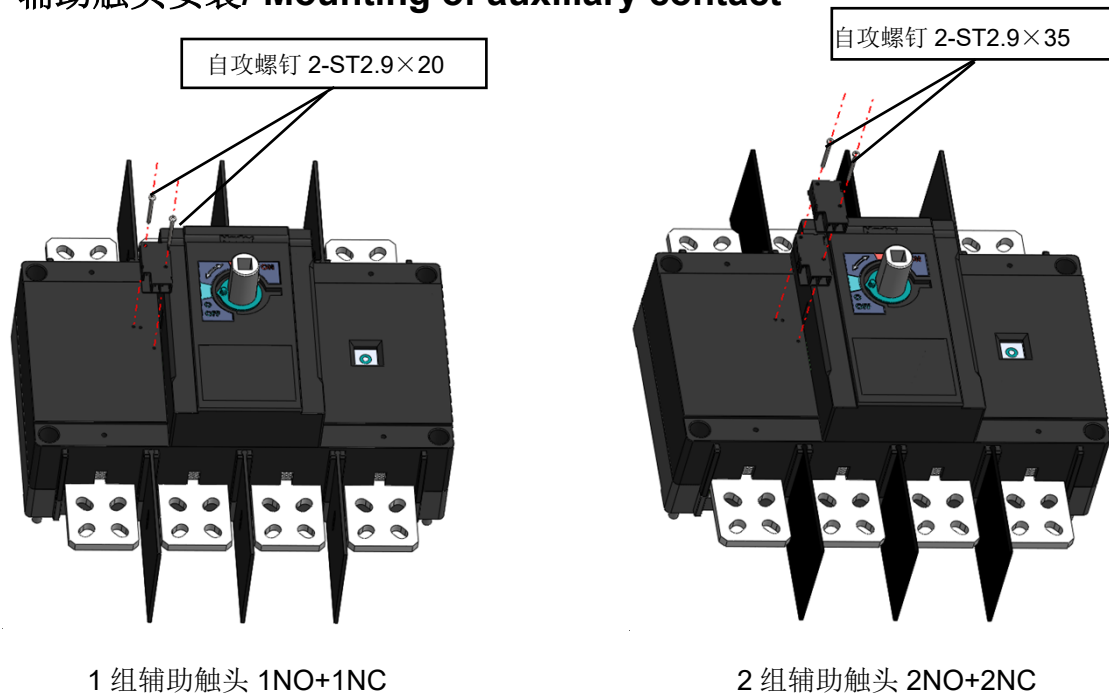

4. 方轴安装/ Mounting of shaft

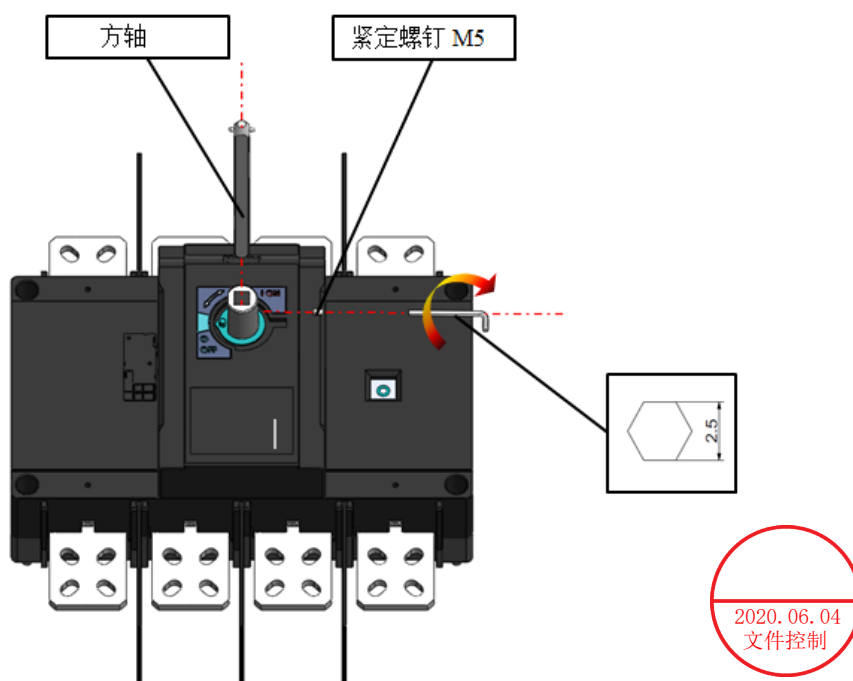


5. 手柄柜门安装/ Panel drilling for handle

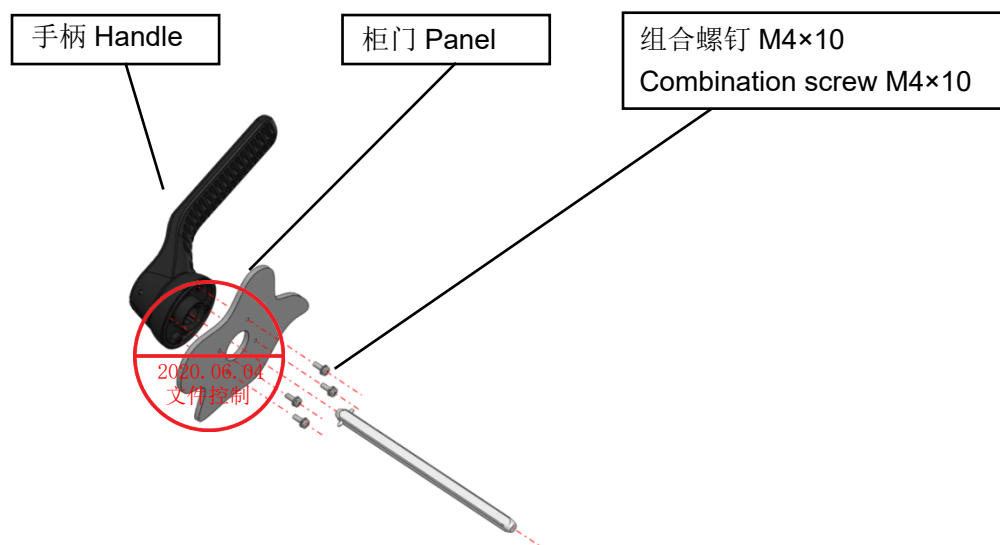


注: 手柄 ON/OFF 位置和产品 ON/OFF 位置对应

Notice: "ON/OFF" position of the handle corresponds to "ON/OFF" status of switch

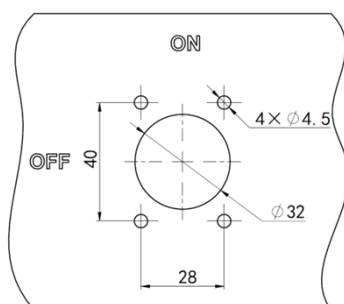

柜门安装孔尺寸 Panel drilling


6. 手柄挂锁安装/ Mounting of handle padlock

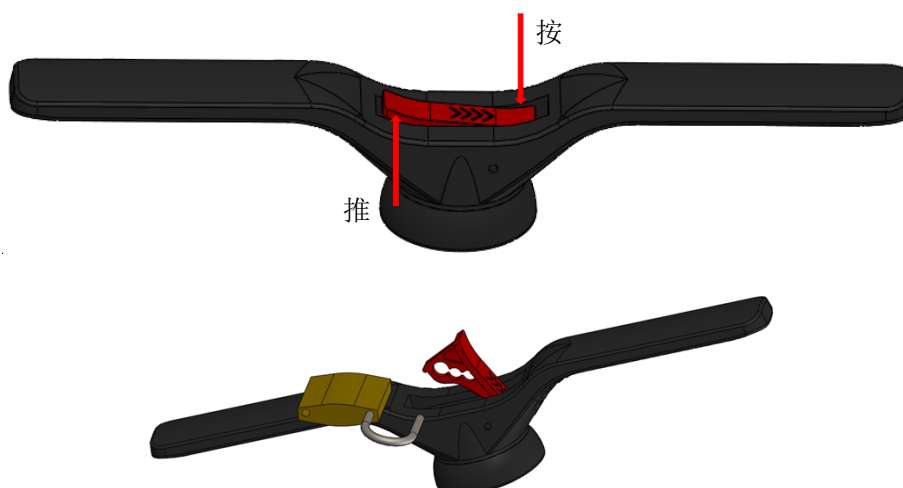

7. 外形安装尺寸/Outline and installation dimensions

7.1、三极产品外形和安装尺寸(柜外操作手柄:SB1-“A”/G3A-1250)

Outline and installation dimension of three-pole product

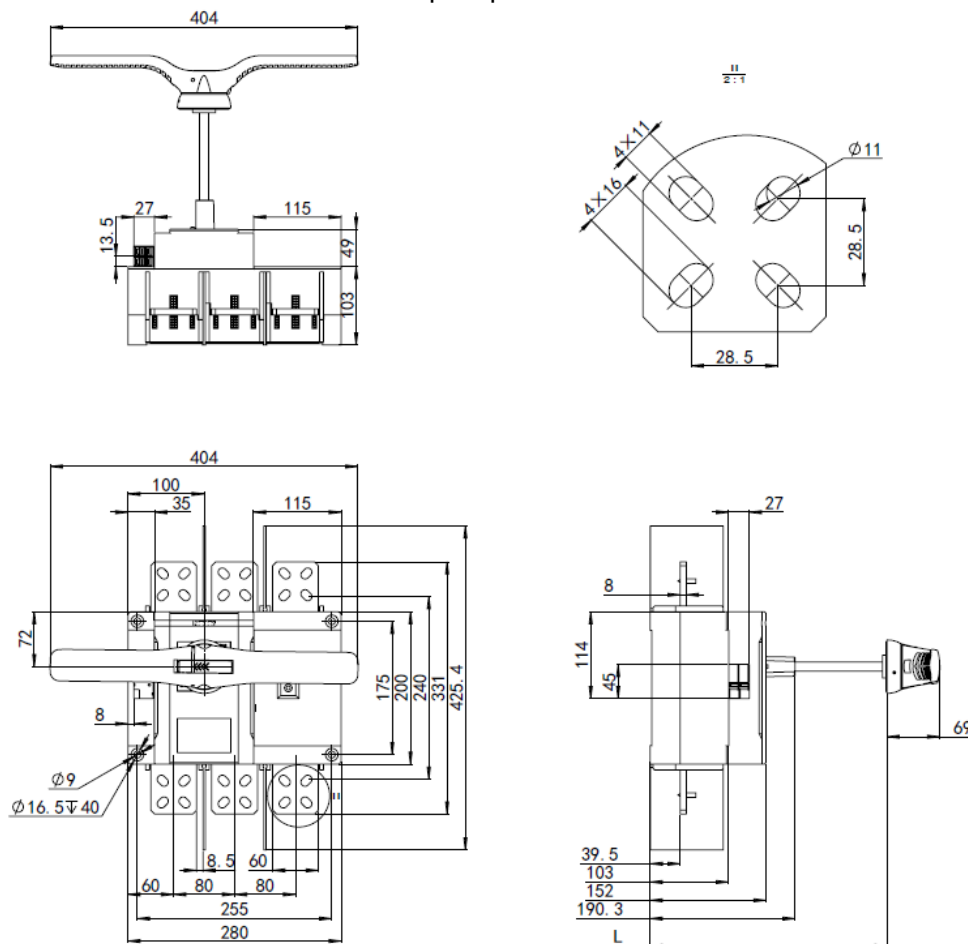


$L = "A" + 116$ (单位: mm, A: 柜外手柄方轴长度)



7.2 四极产品外形和安装尺寸(柜外操作手柄:SB1-“A”/G3A-800)

Outline and installation dimension of four-pole product

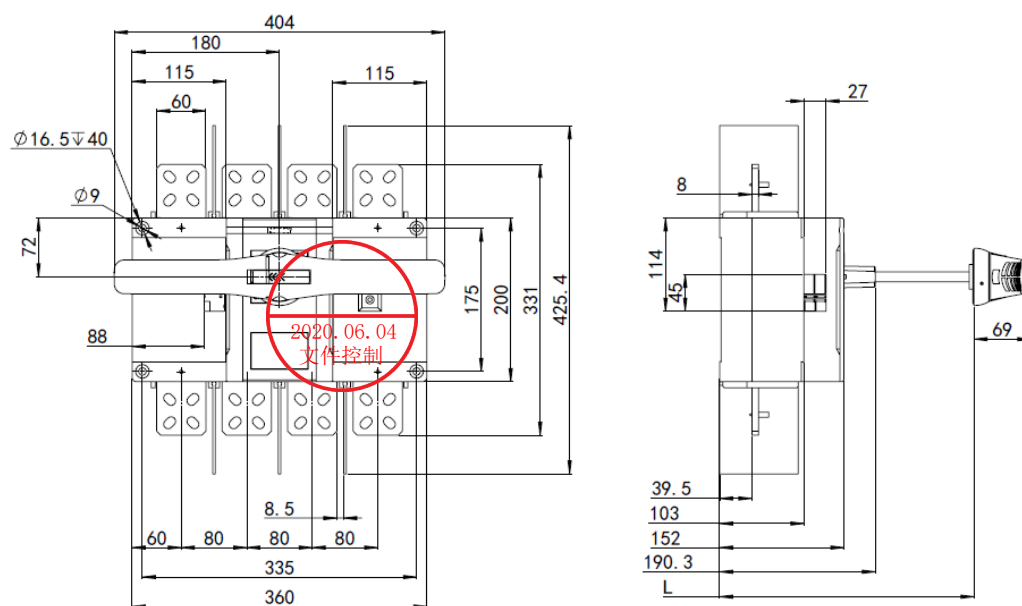 $L = "A" + 116$ (单位: mm, A: 柜外手柄方轴长度)

8. 接线方式/ Circuit diagram

